






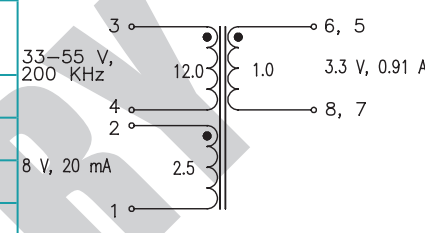
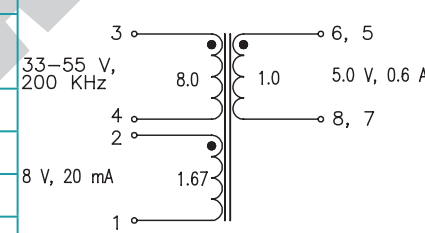
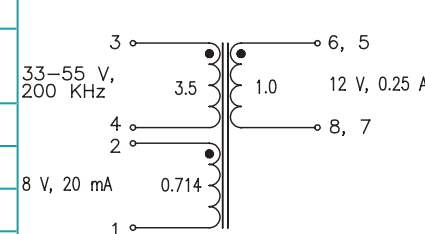
# High Frequency Wire Wound Transformers

EP7 Platforms - SMT



-  **Power Range:** up to 5W
-  **Height:** 9.27mm Max
-  **Footprint:** 13.34mm x 10.7mm Max
-  **Topology:** Forward and Flyback

## Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C<sup>3</sup>

Part Number	Parameter	Configuration	Value	Notes
PAT130NL	Pri. Inductance	(3-4)	500µH ± 10%	 <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	8µH MAX	
	DCR	(3-4)	1750mΩ MAX	
		(6, 5-8, 7)	15mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor		9735.2	
PAT131NL	Pri. Inductance	(3-4)	500µH ± 10%	 <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	7.5µH MAX	
	DCR	(3-4)	1750mΩ MAX	
		(6, 5-8, 7)	35mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor		9735.2	
PAT132NL	Pri. Inductance	(3-4)	521µH ± 10%	 <p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	7.5 µH MAX	
	DCR	(3-4)	1750mΩ MAX	
		(6, 5-8, 7)	100mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor		9937.1	

# High Frequency Wire Wound Transformers

EP7 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C <sup>5</sup>				
PA1279NL	Pri. Inductance	(3-4)	310 $\mu$ H $\pm$ 10%	
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 $\mu$ H MAX	
	DCR	(3-4)	1600m $\Omega$ MAX	
		(6, 5-8, 7)	45 m $\Omega$ MAX	
		(2-1)	2600 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor		6584.5		
FLYBACK TRANSFORMER				
PA1280NL	Pri. Inductance	(3-4)	310 $\mu$ H $\pm$ 10%	
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 $\mu$ H MAX	
	DCR	(3-4)	1600 m $\Omega$ MAX	
		(6, 5-8, 7)	87 m $\Omega$ MAX	
		(2-1)	2650 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor		6584.5		
FLYBACK TRANSFORMER				
PA1281NL	Pri. Inductance	(3-4)	310 $\mu$ H $\pm$ 10%	
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 $\mu$ H MAX	
	DCR	(3-4)	1600 m $\Omega$ MAX	
		(6, 5-8, 7)	550 m $\Omega$ MAX	
		(2-1)	2600 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor		6584.5		
FLYBACK TRANSFORMER				
PA1825NL	Pri. Inductance	(8-1)	24.5 $\mu$ H $\pm$ 10%	
	Lk. Inductance	(8-1) with (2, 3, 4, 5, 6, 7) shorted	110 $\mu$ H MAX	
	DCR	(8-1)	50 m $\Omega$ MAX	
		(7-2)	50 m $\Omega$ MAX	
		(6-3)	110 m $\Omega$ MAX	
		(5-4)	160 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	600 Vdc	
K1 Factor		1635.5		
FLYBACK TRANSFORMER				

# High Frequency Wire Wound Transformers

EP7 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C				
PA2571NL	Pri. Inductance	(1-4)	100µH ±25%	<p>FORWARD TRANSFORMER</p>
	DCR	(1-4)	85 mΩ MAX	
		(5-7)	8760 mΩ MAX	
		(7-8)	2200 mΩ MAX	
	Hi-Pot	Pri-Sec	500 Vrms	
K1 Factor	93.5			
PA2617NL	Pri. Inductance	(3-4)	22.5 µH ±10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (5,7) shorted	0.6 µH MAX	
	DCR	(3-4)	100 mΩ MAX	
		(5-8)	200 mΩ MAX	
		(2-1)	110 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
K1 Factor	1401.9			
PA2626NL	Pri. Inductance	(3-4)	30 µH ±5%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	0.7 µH MAX	
	DCR	(3-4)	250 mΩ MAX	
		(6, 5-8, 7)	72 mΩ MAX	
		(2-4)	170 mΩ MAX	
	Hi-Pot	Pri-Sec	500 Vrms	
K1 Factor	1168.2			
PA3018NL	Pri. Inductance	(3-4)	48.6µH ±5%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	0.9 µH MAX	
	DCR	(3-4)	250 mΩ MAX	
		(6, 5-8, 7)	35 mΩ MAX	
		(2-1)	130 mΩ MAX	
	Hi-Pot	Pri-Sec	500 Vdc	
K1 Factor	1892.5			

# High Frequency Wire Wound Transformers

EP7 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C <sup>2</sup>				
<b>PA3019NL</b>	Pri. Inductance	(3-4)	47.2 $\mu$ H $\pm$ 5%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (1, 2, 8, 7, 6, 5) shorted	0.7 $\mu$ H MAX	
	DCR	(3-4)	250 m $\Omega$ MAX	
		(6, 5-8, 7)	72 m $\Omega$ MAX	
		(2-1)	170 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	500 Vrms	
K1 Factor	1838.0			
<b>PA3020NL</b>	Pri. Inductance	(3-4)	56.7 $\mu$ H $\pm$ 5%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	0.98 $\mu$ H MAX	
	DCR	(3-4)	400 m $\Omega$ MAX	
		(6, 5-8, 7)	200 m $\Omega$ MAX	
		(2-1)	110 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	500 Vrms	
K1 Factor	1766.4			
<b>PA3021NL</b>	Pri. Inductance	(3-4)	48.8 $\mu$ H $\pm$ 5%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	0.4 $\mu$ H MAX	
	DCR	(3-4)	100m $\Omega$ MAX	
		(6, 5-8, 7)	200 m $\Omega$ MAX	
		(2-1)	110 m $\Omega$ MAX	
	Hi-Pot	Pri-Sec	500 Vrms	
K1 Factor	3040.5			

PRELIMINARY

# High Frequency Wire Wound Transformers

EP7 Platforms - SMT

## Notes:

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
3. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak density, use the following formula:

$$B_{pk} \text{ (Gauss)} = K1\_Factor * I_{pk} \text{ (A)}$$

4. In high volt-sec applications, it is important to calculate the core loss of the transformer.

Approximate transformer core loss can be calculated as:

$$CoreLoss \text{ (W)} = 2.5E-14 * (Freq\_kHz)^{1.63} * (\Delta B\_Gauss)^{2.63}$$

where  $\Delta B$  can be calculated as:

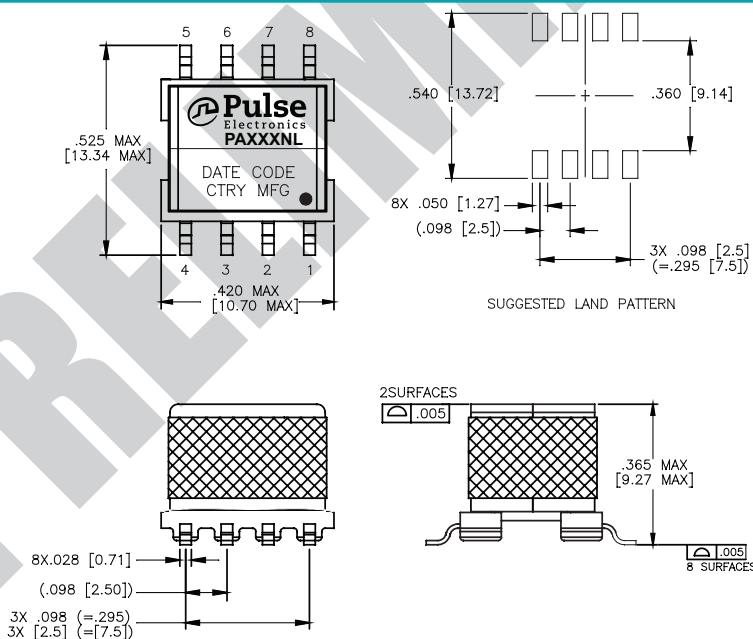
$$\text{For Flyback Topology: } \Delta B = K1\_Factor * (A)$$

$$\text{For Forward Topology: } \Delta B = K1\_Factor * Volt\text{-}\mu\text{sec}$$

5. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA1130NL becomes PA1130NLT). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=24mm), pitch (Po=16mm) an depth (Ko=9.8mm).

## Mechanical

PAXXXNL



## For More Information

**Pulse Worldwide Headquarters**  
12220 World Trade Drive  
San Diego, CA  
92128  
U.S.A.

**Pulse Europe**  
Einsteinstrasse 1  
D-71083 Herrenberg  
Germany  
Tel: 49 7032 78060  
Fax: 49 7032 7806 135

**Pulse China Headquarters**  
B402, Shenzhen Academy of  
Aerospace Technol-  
ogy Bldg.  
10th Kejinan Road  
High-Tech Zone  
Nanshan District  
Shenzhen, PR China  
518057  
Tel: 86 755 3396678  
Fax: 86 755 33966700

**Pulse North China**  
Room 2704/2705  
Super Ocean Finance  
Ctr.  
2067 Yan An Road  
West  
Shanghai 200336  
China  
Tel: 86 21 62787060  
Fax: 86 2162786973

**Pulse South Asia**  
135 Joo Seng Road  
#03-02  
PM Industrial Bldg.  
Singapore 368363  
Tel: 65 6287 8998  
Fax: 65 6287 8998

**Pulse North Asia**  
3F, No. 198  
Zhongyuan Road  
Zhongli City  
Taoyuan County 320  
Taiwan R. O. C.  
Tel: 886 3 4356768  
Fax: 886 3 4356823 (Pulse)  
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2014. Pulse Electronics, Inc. All rights reserved.