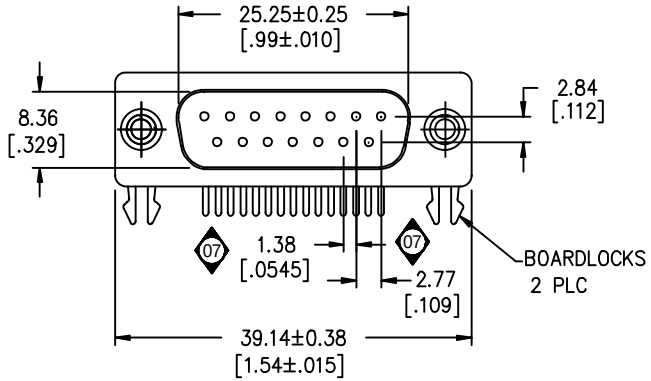

NOTES:

1. MATERIAL
   - HOUSING : PBT, GLASS FILLED, UL RATED 94V-0, BLACK
   - FRONT SHELL: CARBON STEEL
   - CONTACTS, BOARDLOCKS AND INSERTS: BRASS
2. FINISH
   - FRONT SHELL: TIN PLATED.
   - CONTACTS: GOLD FLASH IN MATING AREA OVER 2.54 um [.000100] MIN NICKEL ON ENTIRE CONTACT AREA.
   - BOARDLOCKS AND INSERTS: NICKEL PLATED
3. ELECTRICAL SPECIFICATION:
   - 17-30 OHMS AT 30 MHz. TYP.
   - 22-37 OHMS AT 50 MHz. TYP.
   - 29-40 OHMS AT 100 MHz. TYP.
4. SCI, 56-412-001 AND DATE CODE MARKED ON THIS SURFACE.

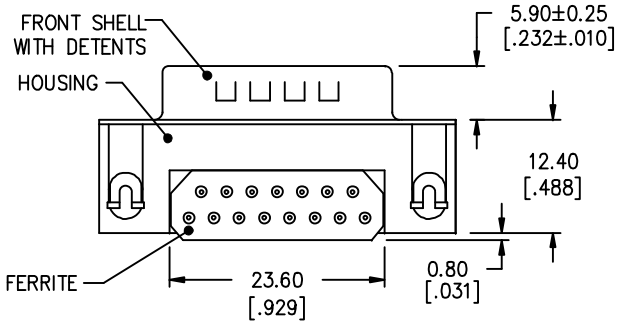

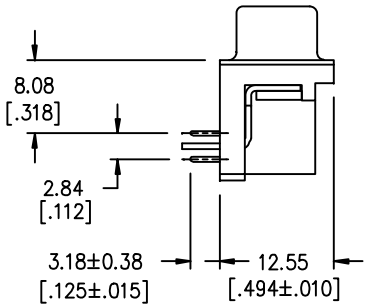

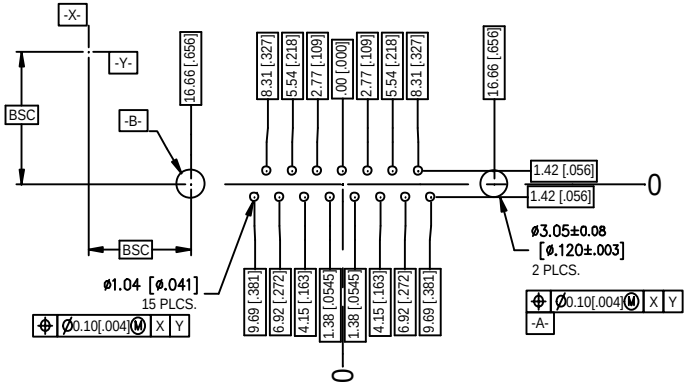

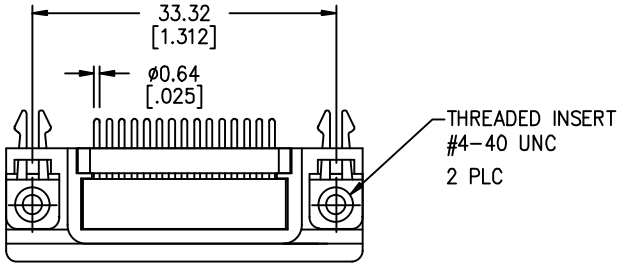

07 P.C. BOARD MOUNTING DIMENSIONS

REV. NO.	CHANGE NOTICE
07	CN 62813-ENG
06	CN 36554-ENG
05	CN 34917-CPD
04	CN 99146

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

SURFACE TEXTURE √

DO NOT SCALE

THIRD ANGLE PROJECTION

TOLERANCES UNLESS OTHERWISE SPECIFIED

Dec. .x ± 0.3 [.012]

Dec. .xx ± 0.13 [.005]

Dec. .xxx ±

Angles ±

CODE IDENT. NO. 0LSP2

SPECTRUM CONTROL INC.

FAIRVIEW PENNSYLVANIA

Dwn. D. GELTZ

Date 3-6-12

Engr. GRUNAUER

Sheet 1 of 1

PLUG ASSEMBLY, 15 POSITION RIGHT ANGLE, FERRITE

56-412-001

Quality Products From The Specialists In Electro—Magnetic Compatibility